

### ITR1203DT50A/TB

#### Features

- Fast response time
- High analytic
- High sensitivity
- Pb free
- This product itself will remain within RoHS compliant version

#### Description

- The ITR1203DT50A/TB consist of an infrared emitting diode and an NPN silicon phototransistor, encased side-by-side on converging optical axis in a black thermoplastic housing,
- The phototransistor receives radiation from the IR LED only .This is the normal situation.
- But when an object is in between, phototransistor could not receive the radiation.

#### Applications

- Mouse Copier
- Switch Scanner
- Floppy disk driver
- Non-contact Switching
- For Direct Board

## Device Selection Guide

Device No.	Chip Material	Lens Color
IR	GaAlAs	Water clear
PT	Silicon	Water clear

## Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25°C Free Air Temperature	Pd	75	mW
	Reverse Voltage	V <sub>R</sub>	5	V
	Forward Current	I <sub>F</sub>	30	mA
	Peak Forward Current (*1) Pulse width ≤100μs, Duty cycle=1%	I <sub>FP</sub>	1	A
Output	Collector Power Dissipation	P <sub>C</sub>	75	mW
	Collector Current	I <sub>C</sub>	20	mA
	Collector-Emitter Voltage	B V <sub>CEO</sub>	35	V
	Emitter-Collector Voltage	B V <sub>ECO</sub>	5	V
Operating Temperature		T <sub>opr</sub>	-30~+85	°C
Storage Temperature		T <sub>stg</sub>	-40~+100	°C
Lead Soldering Temperature (*2) (1/16 inch form body for 5 seconds)		T <sub>sol</sub>	260	°C


Notes: (\*1)  $t_w=100\ \mu\text{sec.}$ ,  $T=10\ \text{msec.}$  (\*2)  $t=10\ \text{Sec}$

**Electro-Optical Characteristics (Ta=25°C)**


Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	$V_F$	1.00	1.18	1.4	V	$I_F=10\text{mA}$
	Reverse Current	$I_R$	---	---	10	$\mu\text{A}$	$V_R=5\text{V}$
	Peak Wavelength	$\lambda_p$	---	940	---	nm	$I_F=10\text{mA}$
Output	Dark C urrent	$I_{CEO}$	---	---	100	nA	$V_{CE}=25\text{V}$
	C-E Saturation Voltage	$V_{CE}(\text{sat})$	---	---	0.4	V	$I_C=0.25\text{mA}$ $I_F=20\text{mA}$
Transfer Characteristics	Collect Current	$I_C(\text{ON})$	0.25	---	1.0	mA	$V_{CE}=5\text{V}$ $I_F=10\text{mA}$
		$I_C(\text{OFF})$	---	---	20	$\mu\text{A}$	
	Rise time	$t_r$	---	15	50	$\mu\text{sec}$	$V_{CE}=5\text{V}$ $I_C=1\text{mA}$ $R_L=1\text{K}\Omega$
	Fall time	$t_f$	---	15	50	$\mu\text{sec}$	

业务技术咨询：TEL/微信: 13422876592

## Typical Electrical/Optical/Characteristics Curves for ITR

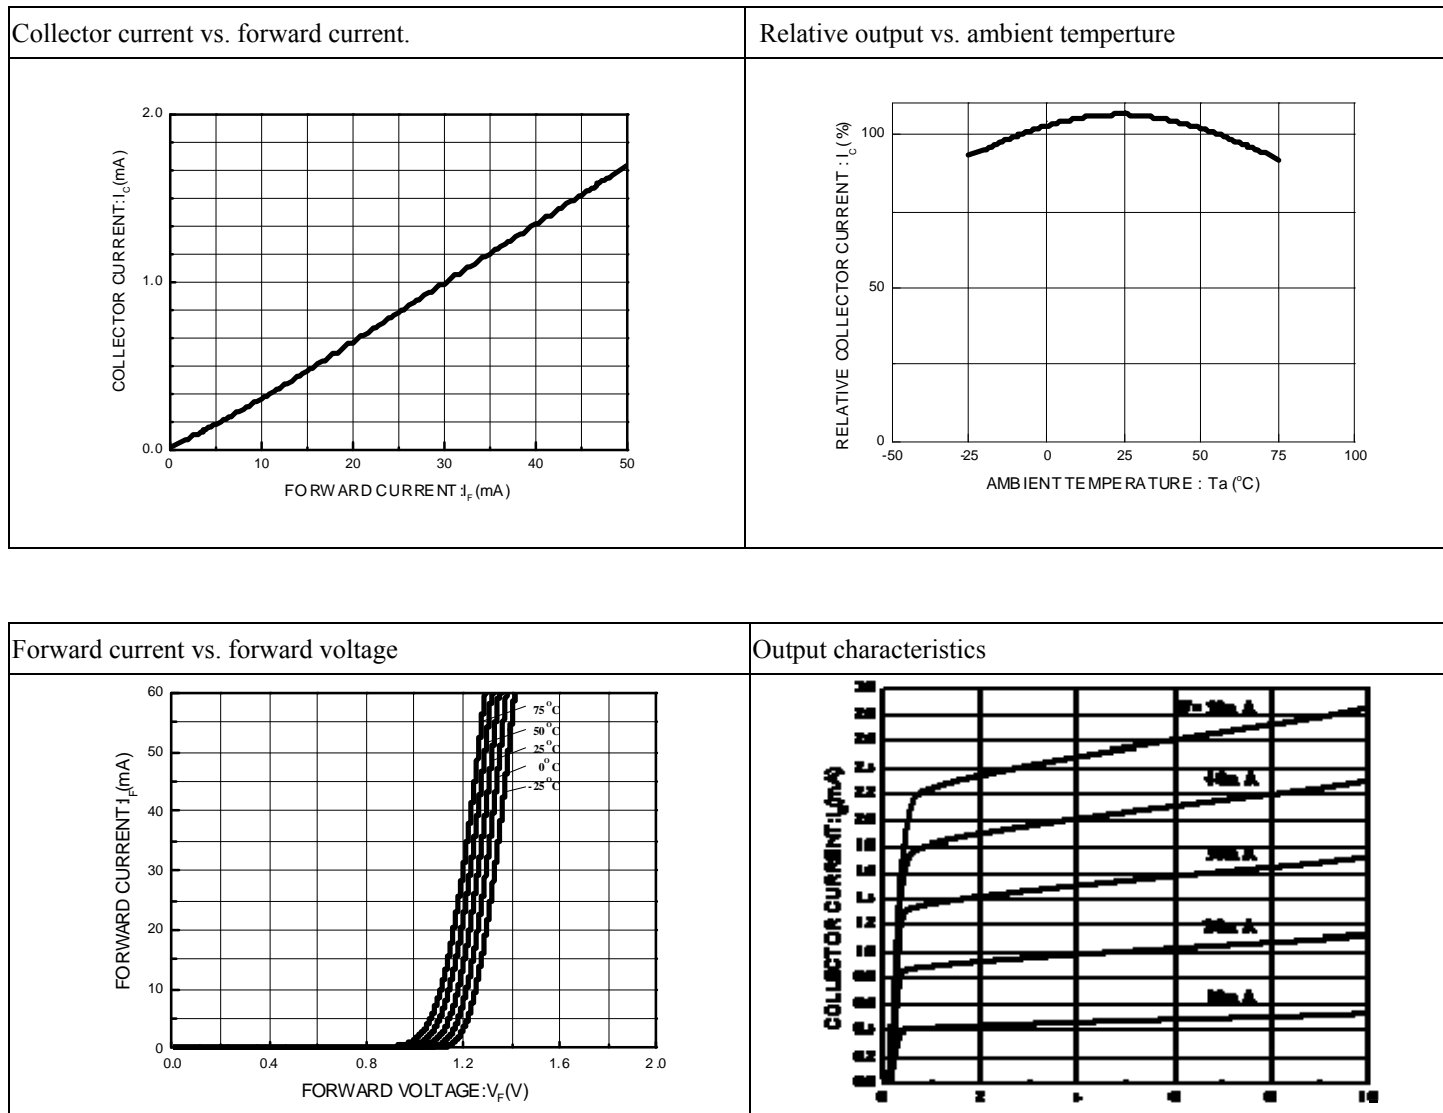


## Spectral Distribution

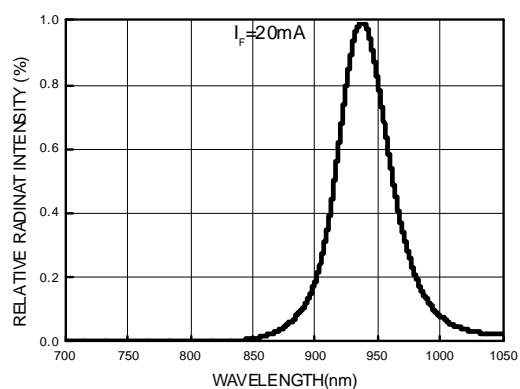

Technical drawing of the 2C45 vacuum tube showing three views: top, front, and side. The top view shows a rectangular base with a central circular feature and four pins labeled 1, 2, 3, and 4. The front view shows the main body with various dimensions and filar numbers. The side view shows the profile of the tube. A legend identifies the pins: 1: Anode, 2: Cathode, 3: Collector, 4: Emitter.

- 1.All dimensions are in millimeters
- 2.Tolerances unless dimensions  $\pm 0.2\text{mm}$
- 3.Lead spacing is measured where the lead emerge from the package
- 4.Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification
- 5.These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent
- 6.When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.

**Packing Spec.:**

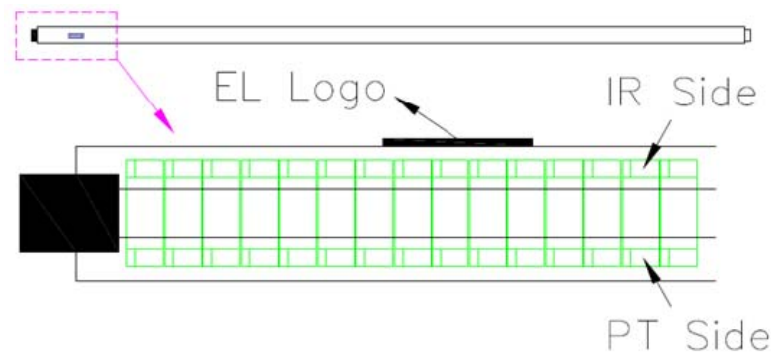

**Packing Quantity Specification**

1. 180pcs/1 Tube
2. 30Tube(5.4Kpcs)/1 Box
3. 12Boxes(64.8Kpcs)/1Carton

**Label Form Specification**

	<b>EVERLIGHT</b>	
CPN : P/N : XXXXXXXXX		
ITR1203DT50A/TB		
QTY : 	CAT : HUE : REF :	
LOT NO : 		
Reference : 		
<b>MADE IN CHINA</b>		

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number
- X: Month
- Reference: Identify Label Number

**Notes**

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.